



Detection of Human Movement Direction Using Optical Flow Analisis on Multiple Camera Angles

Elvira Sukma Wahyuni, Zulfika Iqbal, Dzata Farahiya

Universitas Islam Indonesia, Jl.Kaliurang Km. 14,5, Sleman, 55584, Indonesia

ARTICLE INFORMATION

Received: June 16, 2021

Revised: July 13, 2021

Available online: July 28, 2021

KEYWORDS

Image Processing, CCTV, *Optical Flow*, *HOOF*

CORRESPONDENCE

Phone: 085273578482

E-mail: elvira.wahyuni@uii.ac.id

A B S T R A C T

The active movement of children poses a safety risk in the absence of adult supervision. To reduce the risk of accidents in children, an automatic detection system for the direction of children's movements is crucially needed. In this study, detection of the direction of human movement based on image processing was carried out with the input of videos produce from 4 CCTV installed in each corner of the room. The system will detect the direction of object movement with classification of orientation, namely front, back, right and left. The detection method used in this research is Optical Flow. Optical Flow will calculate the value of the direction or orientation of the movement of an object. The orientation obtained is then accumulated with HOOF (Histogram Orientation of Optical Flow), where HOOF will collect the orientation of objects on the whole frame according to a 8-part Cartesian angle. The results of the orientation with Optical Flow will be compared with the direction of detection measured manually to determine whether the detection of movement direction using Optical Flow is running well. According to the results, it is known that the Optical Flow method has succeeded in detecting the direction of movement accurately based on different camera angles.

INTRODUCTION

In 2019, The total population of Indonesia has reached 266,91 million. The largest population is people in productive age (15 – 64 years old) and the second largest is children (0 – 14 years old), with 66,17 million or about 24,8% of the total population [1]. Large number of children means that we need to be more concern with their development. Children, especially in the very young age, tend to be more active and have great curiosity on what to be seen or heard [2]. They need to be monitored and supervised by adult in order to prevent from the dangerous thing or action that can harm them. One of the solutions is installing a CCTV (Closed Circuit Television) cameras around the house. However, CCTV camera only record events and unable to analyze the movement [3], it is necessary to have an integrating system which able to recognize the direction or the movement of a person through CCTV camera automatically. Several researchers have conducted research on the detection of human movement [4]-[7]. Camera-based human movement detection systems (non CCTV) are also widely developed, various methods have been developed to improve performance such as, [8] performs pixel-based motion detection. [9] detects the movement of objects using cameras and sensors. [10] detected movement during sleep using periodic limb motion detection (PLM).[11] performs face movement detection

using template matching.[12] motion detection with a focus on head movement.

In this paper, we studied about the detection of human movement using videos acquired from CCTV. The camera is only able to record and showing the pictures or videos without analyzing the movement of person. However, if we utilized the camera and used the photos or videos to combine it with video processing technology, we will able to analyze and made prediction with it. The main parameter that we investigated is the detection of human movement and its direction. The direction of human movement is something that can be seen by the human eye and can be processed in the brain where the direction is.

Research [13] had been conducted a study on human movement recognition using Optical Flow histograms. In order to obtain the direction of human movement, a derivative formula from Optical Flow is needed, namely the Lucas-Kanade algorithm. The algorithm works by finding the orientation or value. The orientation values are grouped into Histogram Orientation of Optical Flow or HOOF with a reference angle of Cartesian coordinates by dividing it into 8 parts. In the first part, the orientation is between the angles of 0° to 45° , in the second part it is grouped between the angles of 45° to 90° , in the third part it is grouped from 90° to 135° , the fourth section is 135° to 180° , the fifth section is 180° . to 225° , sixth section 225° to 270° ,

seventh section 270° to 315° and eighth section 315° to 360°. However, this study of HOOF only uses 8 parts which are the minimum references. They lacked of accuracy of the direction of human movement.

The study in [14] determined the direction of object movement based on the Optical Flow feature. The direction or orientation in the optical flow is calculated for each pixel that moves in each frame. The orientation is very large and need to be simplified. To shorten the calculation, the HOOF technique is used which makes the orientation of each pixel in a frame grouped into a single histogram. There were more than one object in the video being tested. In this research, the direction or orientation is calculated for each object so that each frame is divided into 16 grids. The orientation in the grids have been accumulated into the HOOF to simplify the reading of direction or movement in the frame. However, the comparison between the results of motion direction detection using Optical Flow with the actual detection results is not stated in the paper, thus the research that had been carried out was adding the results of the comparison of motion direction detection using Optical Flow detection with actual detection. This paper using research in [13] and [14] as key papers to study.

METHOD

Data

We used the data of CCTV recorded video that installed in 4 corners of the room. The resolution of the video is 432x240 pixels. We recorded video with human as an object and applied several scenarios, such as the object walking towards the front, back, left, and right. The direction of the object's movement is relative to each camera as shown in Figure 2 and an illustration of the scenario of the object's movement at each camera orientation is shown in Figure 1.

The orientation of camera 1 shows the object moving towards the front of camera. While the orientation of camera 3 shows the object moving to wards the back away from the camera. From the left and right point a view, the camera 2 shows the object moving to the right and the camera 4 shows the object moving to the left of the camera.


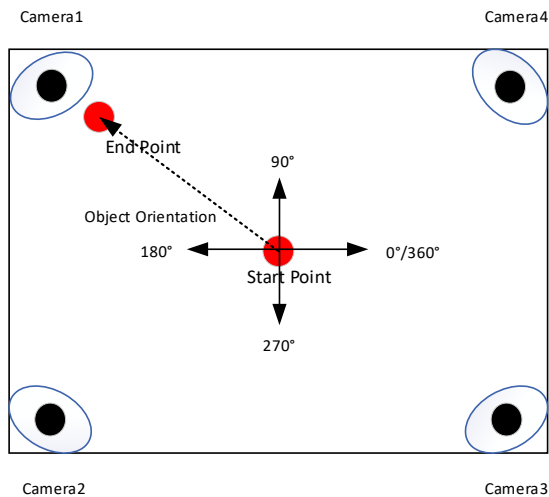


Figure 1. The illustration of data acquisition.

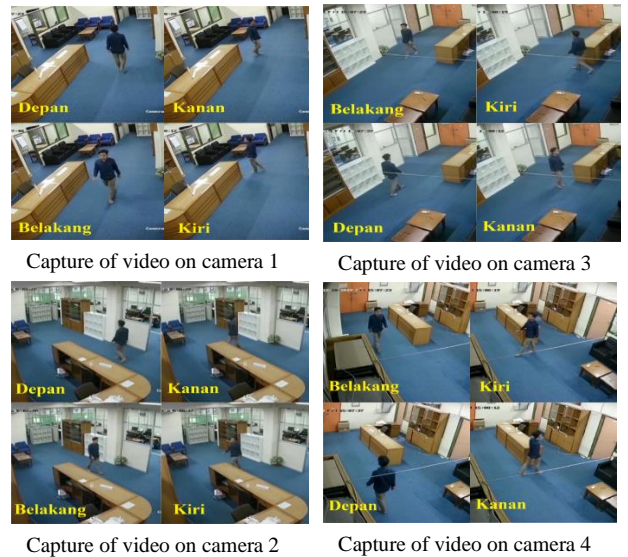

*Note:

- Depan = Move straight towards the camera
- Belakang = Move straight away from camera
- Kanan = Move to the right side of the camera
- Kiri = Move to the left side of the camera

Figure 2. The examples of data.

Optical Flow

Optical Flow is a method used to find the value of the motion vector by calculating the field of optical flow in the image. Optical Flow in moving object detection works by estimating the movement of a part of an image based on the derivative of light intensity or $I(x, y, t)$ in an image sequence. Optical Flow assumes that the flow or intensity of light in an image is basically a constant value [15] as it is shown in (1):

$$I_{(x(t),y(t),t)} = Constant \tag{1}$$

In two-dimensional space, Optical Flow define how further an image pixel moves between two consecutive frames. A pixel at the initial position (x, y, t) with intensity $I_{(x,y,t)}$ will move with the derivative distance dx, dy and dt in between two frames as it is stated in (2).

$$I_{(x,y,t)} = I_{(x+\Delta x,y+\Delta y,t+\Delta t)} - I_{(x,y,t)} \tag{2}$$

- $I_{(x(t),y(t),t)}$ = Light intensity of *Optical Flow*
- $I_{(x+\Delta x,y+\Delta y,t+\Delta t)}$ = Light intensity of *Optical Flow* that move for $\Delta x, \Delta y$ dan Δt .

Assuming that the movement is very small [15], then the equation in $I_{(x,y,t)}$ can be developed to obtain (3),

$$I_{(x+\Delta x,y+\Delta y,t+\Delta t)} = I_{(x,y,t)} + \frac{dl}{dx} \Delta x + \frac{dl}{dy} \Delta y + \frac{dl}{dt} \Delta t + H.O.T \tag{3}$$

H.O.T(Higher-Order-Terms) in (3) is an approximation solution, ude to very small value, it can be ignored to reach a simplified version in (4). Then we applied a differential equation based on time and we obtain (5). Since the derivative of the position function with respect to time is velocity, the equation in (5)

becomes (6). With V_x, V_y is the velocity component of Optical Flow $I_{(x,y,t)}$, and $\frac{dl}{dx} \frac{dl}{dy} \frac{dl}{dt}$ is the partial derivative of the image $I_{(x,y,t)}$ which turns I_x, I_y, I_t [10] then the equation becomes (7) :

$$I_{(x+\Delta x, y+\Delta y, t+\Delta t)} = I_{(x,y,t)} + \frac{dl}{dx} \Delta x + \frac{dl}{dy} \Delta y + \frac{dl}{dt} \Delta t$$

$$\frac{dl}{dx} \Delta x + \frac{dl}{dy} \Delta y + \frac{dl}{dt} \Delta t = I_{(x+\Delta x, y+\Delta y, t+\Delta t)} - I_{(x,y,t)} \quad (4)$$

$$\frac{dl}{dx} \Delta x + \frac{dl}{dy} \Delta y + \frac{dl}{dt} \Delta t = 0$$

$$\frac{dl}{dx} \frac{\Delta x}{\Delta t} + \frac{dl}{dy} \frac{\Delta y}{\Delta t} + \frac{dl}{dt} = 0 \quad (5)$$

$$\frac{dl}{dx} V_x + \frac{dl}{dy} V_y + \frac{dl}{dt} = 0 \quad (6)$$

$$\frac{dl}{dx} V_x + \frac{dl}{dy} V_y = -\frac{dl}{dt}$$

With V_x, V_y is the velocity component of Optical Flow $I_{(x,y,t)}$, and $\frac{dl}{dx} \frac{dl}{dy} \frac{dl}{dt}$ is the partial derivative of the image $I_{(x,y,t)}$ which turns I_x, I_y, I_t [14] then the equation becomes (7) :

$$I_x V_x + I_y V_y = -I_t \quad (7)$$

with:

- I_x = Pixel intensity gradient on the x-axis
- I_y = Pixel intensity gradient on the y-axis
- I_t = Pixel intensity gradient in the time domain
- V_x = Pixel velocity on the x-axis
- V_y = Pixel velocity on the y-axis

Equation 7 yields the final Optical Flow equation to get the pixel velocity on the x-axis and y-axis. However, this equation cannot be solved because there are two unknown variables in one equation. This problem is called the aperture problem of Optical Flow. Hence, we need to develop method that able to determine V_x and V_y using Lucas-Kanade algorithm [15].

Lucas-Kanade Algorithm

The Lucas-Kanade algorithm is an Optical Flow algorithm that solves the previous Optical Flow equation by combining information from adjacent pixels [15]. This method assumes the image position between two frame images is small and close to constant. Then the equation in this method becomes (8).

$$I_x(q1)V_x + I_y(q1)V_y = -I_t(q1)$$

$$I_x(q2)V_x + I_y(q2)V_y = -I_t(q2) \quad (8)$$

$$I_x(qn)V_x + I_y(qn)V_y = -I_t(qn)$$

Where q1, q2, q3 is a pixel in a frame, while $I_x(qi), I_y(qi), I_t(qi)$ is a partial derivative of the image that related to the coordinate position x, y and time domain. The equation (8) can be written in the matrix form in (9).

$$A v = (-b), \quad (9)$$

with:

$$A = \begin{bmatrix} I_x(q1) & I_y(q1) \\ \vdots & \vdots \\ I_x(qn) & I_y(qn) \end{bmatrix}, \quad v = \begin{bmatrix} V_x \\ V_y \end{bmatrix}, \quad b = \begin{bmatrix} -I_t(q1) \\ -I_t(q2) \\ \vdots \\ -I_t(qn) \end{bmatrix}$$

If we want to find matrix v then the equation can be written as in (10) and (11). In (11), the velocity of the image, V_x and V_y can be obtained. Optical flow assumes the small pixel of movement, however it has the drawback which unable to detect large movement. To cope up with it, we used pyramid method, namely pyramidal Lucas-Kanade [16].

$$v = (A^T A)^{-1} A^T (-b) \quad (10)$$

$$\begin{bmatrix} V_x \\ V_y \end{bmatrix} = \begin{bmatrix} \sum_i I_x(qi)^2 & \sum_i I_x(qi)I_y(qi) \\ \sum_i I_x(qi)I_y(qi) & \sum_i I_y(qi)^2 \end{bmatrix}^{-1} \begin{bmatrix} -\sum_i I_x(qi)I_t(qi) \\ -\sum_i I_y(qi)I_t(qi) \end{bmatrix} \quad (11)$$

The direction or orientation of the movement in Optical flow can be determined by using V_x and V_y [16]. The final equation to get the direction is the calculate the angle between the velocity of x-axis and y-axis as it is shown in (12), where $\theta(V_x, V_y)$ is the direction or orientation movement.

$$\theta(V_x, V_y) = \tan^{-1} \frac{V_y}{V_x} \quad (12)$$

Figure 3 shows the result of orientation movement in a frame according to the figure 2. Figure 4 shows the cartesian coordinate of x-axis and y-axis. While figure 5 shows the coordinate of the image, which has positive x-axis to the right but opposite from cartesian coordinate in figure 4, the positive y-axis is toward downwards.

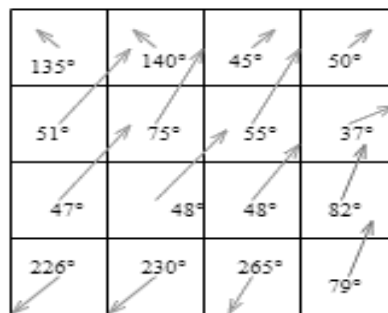


Figure 3. Orientation movement of figure 2 [17].

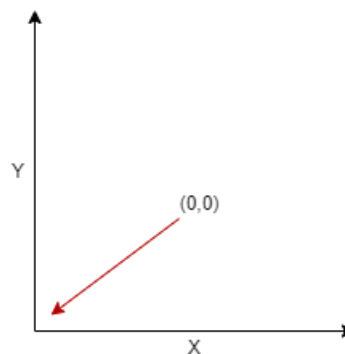


Figure 4. Cartesian Coordinate.




Figure 5. Coordinate of the image.

Optical Flow Detection Movement

We utilized software Matlab to process the data of video recording from CCTV. We used Lucas-Kanade optical flow algorithm to detect the vector movement. There are several steps to reach the decision of the movement.

Step 1: Input Data Video

In the first step, we acquired the video recording of CCTV and used it as the input. Data from each camera was processed to generate parameters of the orientation in Optical flow. At the same time, we determined the starting point of the object and the movement direction based on the cartesian coordinate point of view. The data were stored and compared later with the result of the detection system.

Step 2: Frames Reading

Basically, the video is a collection of moving frames, thus we proceed the video frame-by-frame [18].

Step 3: Change to Grayscale

The next process was changed the frame image from RGB (Red-Blue-Green) into greyscale. It need to be done because optical flow is able to read only the changing in light intensity in gray degrees.

Step 4: The computation of Algorithm

Now the RGB image has been converted to a greyscale. Optical flow, by using Lucas-Kanade algorithm, calculated the orientation of the image. The result is in radian and we need to convert it into degrees. The negative value of the angle is added 360 degrees to make easier computation. Nan orientation (Not a Number) is an orientation with a value of 0. The result of NaN aims to remove the value 0 from HOOF, because HOOF tend to pick values that appears the most according to the angles. to the parts of the angle.

Step 5: Detection of the Object with GMM and Kalman Filter

The function of GMM (Gaussian Mixture model) and Kalman Filter in this study is to make it easier to visualize as well as speed up analyzing the orientation of human movement. Object detection with GMM is to segment objects or detect foreground (foreground/objects) by separating pixel values that do not match the Gaussian distribution in the background [19]. Kalman filter serves to track an object that has been defined by GMM. When

the object is moving or the frame is running, the Kalman filter will predict the movement of the object in each frame.

Step 6: Compute the Orientation

The orientation that was calculated and analyzed is the orientation of the object. The orientation of the object was distinguished by the presence of a box on the object, to distinguish human objects from other moving objects.

Step 7: Orientation Coding

In this step, the orientation obtained was encoded or converted into HOOF. HOOF is a histogram that serves to collect the orientation value of each pixel in each frame within a certain range of angles [5]. The 12 parts of the angle division is shown in the Table 1.

Step 8: Decision of the Orientation

Lastly, the decision of human movement direction was determined by the highest number of orientations. It was visualized in the last frame.

Table 1. The division of the angles.

Part	Angle
1	$0^\circ/360^\circ < \theta \leq 45^\circ$
2	$45^\circ < \theta \leq 90^\circ$
3	$90^\circ < \theta \leq 135^\circ$
4	$135^\circ < \theta \leq 180^\circ$
5	$180^\circ < \theta \leq 225^\circ$
6	$225^\circ < \theta \leq 270^\circ$
7	$270^\circ < \theta \leq 315^\circ$
8	$315^\circ < \theta \leq 0^\circ/360^\circ$

Furthermore, to facilitate the classification we grouped the eight angle ranges into four directions, namely front, back, left and right as shown in Table 2. Classification relative to each camera as shown in Figure 1.

Table 2. Direction Classification

No Camera	Direction	Part
Camera 1	Front	2 and 3
	Back	6 and 7
	Right	4 and 5
	Left	1 and 8
Camera 2	Front	4 and 5
	Back	1 and 8
	Right	2 and 3
	Left	6 and 7
Camera 3	Front	6 and 7
	Back	2 and 3
	Right	1 and 8
	Left	4 and 5
Camera 4	Front	1 and 8
	Back	4 and 5
	Right	2 and 3
	Left	6 and 7

Evaluation

The evaluation of the detection system with optical flow is compared to the manual set point to obtain the accuracy. The comparison will be analyzed to determine whether the detection of the direction of human movement with Optical Flow has a

good performance. Figure 6 shows a Cartesian diagram as a reference for determining direction.

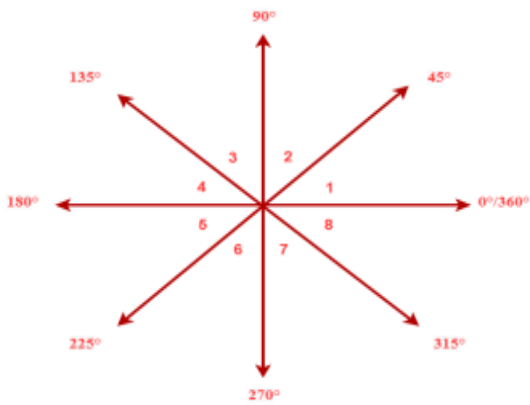


Figure 6. Cartesian Diagram

RESULTS AND DISCUSSION

Result of Human Movement Detection System with Optical Flow

The tests were conducted to find out the performance of detection system with Optical flow. One of the scenarios of the test is shown in Figure 7. While the rest of the result of scenarios is shown in Table 2.



Figure 7. Result test of detection on Camera 1

We took the 16 videos from 4 CCTV with different angle. Based on the result, we obtain that the optical flow is able to detect the direction of human movement with successful rate of 100%.

Table 2. The result of the test with Optical Flow

No	Camera	Direction	Status
1	1	Front	Detected
2		Back	Detected
3		Right	Detected
4		Left	Detected
5	2	Front	Detected
6		Back	Detected
7		Right	Detected
8		Left	Detected
9	3	Front	Detected
10		Back	Detected
11		Right	Detected
12		Left	Detected
13	4	Front	Detected
14		Back	Detected
15		Right	Detected
16		Left	Detected

Performance of Orientation Direction of Movement with HOOF Classifier and Optical Flow

Orientation direction is classified with histogram HOOF based on the cartesian diagram. Figure 8 shows one of the example of the histogram HOOF on camera 1 with the direction of human movement walk to the front side.

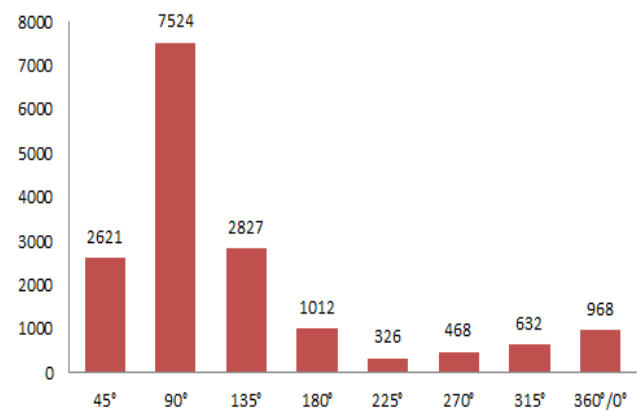


Figure 8. Histogram HOOF on Camera 1 with direction to the front side.

Table 3. Result of Detection of Movement Direction using Optical Flow from Angle Orientation Point a View

No	Camera	Direction	Number of orientations with accumulated HOOF values							The direction with the most detection frequency	
			Angle								
			45°	90°	135°	180°	225°	270°	315°	360°	
1	1	Front	2621	7524	2827	1012	326	468	632	968	90°
2		Back	458	346	463	1399	2924	7249	2233	682	270°
3		Right	193	33	30	0	21	16	65	220	360°
4		Left	238	54	67	678	135	311	99	315	180°
5	2	Front	1248	1865	2181	6468	2107	1586	733	986	180°
6		Back	2408	966	249	259	218	503	2396	8266	360°
7		Right	2968	800	308	80	48	93	636	2872	45°
8		Left	265	217	353	487	650	565	68	304	225°
9	3	Front	563	875	1108	2646	5075	3665	1293	919	225°
10		Back	10776	4166	623	116	173	281	545	2466	45°

No	Camera	Direction	Number of orientations with accumulated HOOF values							The direction with the most detection frequency	
			Angle								
			45°	90°	135°	180°	225°	270°	315°	360°	
11		Right	589	1175	1389	3704	2118	1324	571	585	180°
12		Left	2126	586	144	115	239	173	755	3630	360°
13	4	Front	1779	425	249	298	457	1237	8397	225°	315°
14		Back	2143	3557	5487	5605	1365	2100	257	45°	180°
15		Right	436	535	714	1134	1899	1050	316	180°	225°
16		Left	5817	1591	287	125	249	446	1447	360°	45°

Initially, the angle orientation of optical flow on all frame video can not be the final direction of movement. This is because there is no information about the classification of orientation. Thus, at the final process, the detection of direction with optical flow needs to be classified with HOOF. The classification of HOOF collects all angle orientation of every pixel in each frame and classify it according to 8 diagrams. Every angle with the most orientation results will be the final decision of direction. the result from all test video is shown in Table 3.

The comparison of between the detection with optical flow and the result with manually detection of direction was done to get the accuracy of the detection. For each camera, we computed manually the angle with different point a view, which means that for every camera can be relatively different angle. Figure 9 shows the illustration of manually computation of angle. While the result of the comparison is shown in Table 4. The Accuracy yields 87,5%, which means out 14 out of 16 videos tested is compatible with manually detection. While 2 of 16 videos has wrong estimation, that is from camera 1 of the right side and camera 3

of the front side. Detection error occurs because the initial movement of the detected object is covered by immovable objects around the detection area.

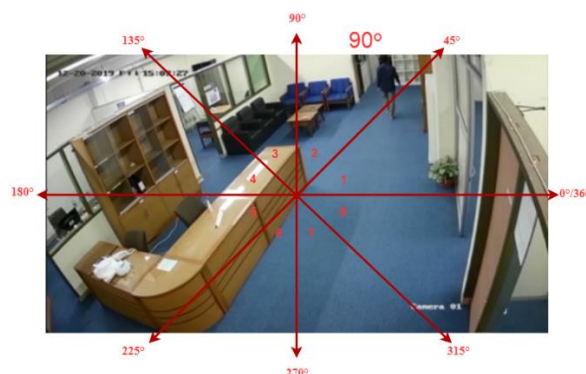


Figure 9. Illustration of Manually Computation of Angle

Tabel 4. The Comparion of Detection of DIection with Optical Flow and Manually Computaion

No	Camera	Direction	Optical flow detection result	Manual Detection Results	Conclusion
1	1	Front	90°	90°	True
2		Back	270°	270°	True
3		Right	360°	45°	False
4		Left	180°	180°	True
5	2	Front	180°	180°	True
6		Back	360°	360°	True
7		Right	45°	45°	True
8		Left	225°	225°	True
9	3	Front	225°	225	True
10		Back	45°	90°	False
11		Right	180°	180°	True
12		Left	360°	360°	True
13	4	Front	315°	315°	True
14		Back	180°	180°	True
15		Right	225°	225°	True
16		Left	45°	45°	True

Comparison with Other Research

In this part, we compare our experimental method and result with the previous results. Table 5 shows the different method and previous research as well as its accuracy.

Tabel 5 Comparisson with previous research

No.	Research	Method	Accuracy	Object detection	Detection Parameters
1	Saidasul Usmanhujavev, et al [20]	<i>You Only Look Onve Version 3 (YOLOv 3)</i>	91.98 %	Vehicle	Training pixels
2	Solichin, et al [13]	<i>Optical Flow-Horn Schunk</i>	98.1 %	Human	HOOF
3	Ishii, et al [14]	<i>Cubic Higher-order Local Auto Correlation (CHLAC)</i>	82 %	Human	Training pixels
4	Proposed Research	<i>Optical Flow-Lucas Kanade</i>	87,5 %	Human	HOOF

Explicitly in the table5, the accuracy of our method is lower than the research in [13] and [20]. However, the detection with optical flow method, especially with Lucas-Kanade algorithm has less complexity in term of it do not need training data as proposed in [20] and [14]. The method is similar with research in [13], yet the difference is they use more complex algorithm, Horn Schunk, while we implemented simplified version of algorithm with Lucas-Kanade. Additionally, we utilized more CCTV camera which produce more point a view to detect compared with the research in [20], [13], and [14] which only used one camera.

CONCLUSIONS

Detection system of human movement direction using optical flow is able to detect all of direction and orientation from four cameras, where each camera shows an object that moves with different scenarios, to the front, back, right and left side. The results show that the 16 tested scenarios are able to detect the direction of movement with the successful rate 100%. While the results of angle orientation show the accuracy of 87,5%. Moreover, compared to the previous research, the less complex method is the advantage of optical flow with Lucas-Kanade and HOOF diagram.

REFERENCES

- [1] Kementerian Perencanaan Pembangunan Nasional (Bappenas), "Jumlah Penduduk Indonesia 2019 Mencapai 267 Juta Jiwa |," *Dkatadata.co.id*, 2019. [Online]. Available: <https://databoks.katadata.co.id/datapublish/2019/01/04/jumlah-penduduk-indonesia-2019-mencapai-267-juta-jiwa>.
- [2] Windiarjo and Yanto, "PROFIL ANAK INDONESIA," *Kementeri. Pemberdaya. Peremp. dan Perlindungan Anak ii*, vol. 5, no. 1, pp. 12–21, 2018.
- [3] K. Lertniphonphan, S. Aramvith, and T. H. Chalidabhongse, "Human action recognition using direction histograms of optical flow," *11th Int. Symp. Commun. Inf. Technol. Isc. 2011*, vol. c, no. Iscit, pp. 574–579, 2011.
- [4] Q. Wu, J. Yang, and J. Wu, "Evaluation of human pointing movement characteristics for improvement of human computer interface," 2010 IEEE Int. Conf. Inf. Autom. ICIA 2010, pp. 799–804, 2010.
- [5] N. Yodpjit, K. Pongmit, T. Sittiwanchai, and M. Jongprasithporn, "Designing a 3D human movement analysis system," 2017 IEEE 3rd Int. Conf. Eng. Technol. Soc. Sci. ICETSS 2017, vol. 2018-January, pp. 1–5, 2018.
- [6] G. Mokhtari, Q. Zhang, and M. Karunanithi, "Modeling of human movement monitoring using Bluetooth Low Energy technology," *Proc. Annu. Int. Conf. IEEE Eng. Med. Biol. Soc. EMBS*, vol. 2015-November, pp. 5066–5069, 2015.
- [7] M. B. Frasetyo, J. T. Elektro, F. T. Industri, and U. I. Indonesia, "Sistem pendeteksi jatuh pada manusia berbasis pengolahan citra," 2018.
- [8] A. Heinrich, D. Geng, D. Znamenskiy, J. P. Vink, and G. De Haan, "Robust and sensitive video motion detection for sleep analysis," *IEEE J. Biomed. Heal. Informatics*, vol. 18, no. 3, pp. 790–798, 2014.
- [9] A. Zarkasi et al., "Face Movement Detection Using Template Matching," *Proc. 2018 Int. Conf. Electr. Eng. Comput. Sci. ICECOS 2018*, vol. 17, pp. 333–338, 2019.
- [10] N. Rawat, J. S. Sodhi, and R. K. Tyagi, "Acquiring and Analyzing Movement Detection through Image Granulation," *IEEE Int. Conf. Issues Challenges Intell. Comput. Tech. ICICT 2019*, 2019.
- [11] I. V. Paputungan, M. R. Al Fitri, and U. Y. Oktiawati, "Motion and Movement Detection for DIY Home Security System," 2019 IEEE Conf. Sustain. Util. Dev. Eng. Technol. CSUDET 2019, pp. 122–125, 2019.
- [12] S. S. Mane and A. R. Surve, "Engagement detection using video-based estimation of head movement," 2018 3rd IEEE Int. Conf. Recent Trends Electron. Inf. Commun. Technol. RTEICT 2018 - Proc., pp. 1745–1749, 2018.
- [13] A. Solichin, A. Harjoko, and A. E. Putra, "Movement direction estimation on video using optical flow analysis on multiple frames," *Int. J. Adv. Comput. Sci. Appl.*, vol. 9, no. 6, pp. 174–181, 2018.
- [14] M. B. Frasetyo, "Sistem pendeteksi jatuh pada manusia berbasis pengolahan citra," *Skripsi, tidak diterbitkan*, J. T. Elektro, F. T. Industri, and U. I. Indonesia, 2018.
- [15] Y. Mi, P. K. Bipin, and R. K. Shah, "Using Lucas-Kanade Algorithms to Measure Human Movement," *Commun. Comput. Inf. Sci.*, vol. 835, no. 1, pp. 118–130, 2019.
- [16] N. Sharmin and R. Brad, "Optimal filter estimation for Lucas-Kanade optical flow," *Sensors (Switzerland)*, vol. 12, no. 9, pp. 12694–12709, 2012.
- [17] R. V. H. M. Colque, C. Caetano, M. T. L. De Andrade, and W. R. Schwartz, "Histograms of Optical Flow Orientation and Magnitude and Entropy to Detect Anomalous Events in Videos," *IEEE Trans. Circuits Syst. Video Technol.*, vol. 27, no. 3, pp. 673–682, 2017.
- [18] Z. Wang, L. Zheng, Y. Liu, and S. Wang, "Towards Real-Time Multi-Object Tracking," *Comput. Sci.*, vol. 1, pp. 1–9, 2019.
- [19] H. Vazirani, A. Kautsar, J. Fisika, F. Sains, and U. Diponegoro, "Implementasi Object Tracking Untuk Mendeteksi Dan Menghitung Jumlah Kendaraan Secara Otomatis Menggunakan Metode Kalman Filter Dan Gaussian Mixture Model," *Youngster Phys. J.*, vol. 5, no. 1, pp. 13–20, 2016.
- [20] S. Usmanhujavev, S. Baydadaev, and K. J. Woo, "Real-time, deep learning based wrong direction detection," *Appl. Sci.*, vol. 10, no. 7, pp. 1–13, 2020.

AUTHOR(S) BIOGRAPHY

Elvira Sukma Wahyuni

Elvira Sukma Wahyuni received her bachelor degree in Informatic Engineering from Universitas Negeri Padang in 2012. She received her Master degree from Universitas Gadjah Mada in 2014. Currently, she is a lecturer in Department of Electrical Engineering, Universitas Islam Indonesia (UII). Her current research interests include image processing, computer vision, and machine learning.

Zulfika Iqbal

He was one of the students of bachelor degree of electrical engineering at University Islam Indonesia. He graduated in 2020.

Dzata Farahiyah

She received a bachelor degree in electrical engineering at Institute Technology of Sepuluh Nopember, Surabaya in 2010. Then, she pursued a Master degree in Communication Engineering, Electrical Engineering department, at University of Duisburg-Essen, in Germany and graduated in 2014. Currently, she is a lecturer in Universitas Islam Indonesia.